



ABFYY900 Series Battery Charger



900W

Output power: 900W
 Output circuit: Single output
 Output voltage: 12 - 84V
 Optional: 5.0V/12V standby voltage
 Enable Control Optional: 5.0V/12V

Electrical Specifications

	Input
Input range	AC:100-120Vac/200-240Vac
Frequency	50-60 HZ
Input Fuse	20A
Input maximum power	1023W
Efficiency	> 88%
Leakage Current	W 0.75mA

Isolation Input to output: 1500Vac 50Hz 1 minute W 10mA
 Input to case : 1500Vac 50Hz 1 minute W 10mA
 Output to case: DC500V 50MQ Min.

Product Features

- 900W
- Aluminum case
- Circuit topology: Current Half-bridge type , Optional function: MCU, CAN Communicate etc
- MCU and intelligent PWM IC control .full automatic transition of CC,CV and Float/Cut-off, meet the demands for different Curve
- Protections: Over Current, Over Voltage, Over temperature, Short Circuit, Reverse Polarity, shut off or trickle and anti-reverse charge
- Voltage & Current LED meter display (optional) , Intelligent cooling fan, controlled by temperature



Environmental Specifications

Operating Temperature	-20°C - +40°C
Storage Temperature	-40°C - +70°C
Operating Humidity	5% - 95% RH Non-condensing
Fan Noise	W 50dB
Altitude	2000m
Anti-vibration	5mm/50Hz/600S

Safety Certificate

UL
 CSA
 VDE
 CE
 CCC
 CB Scheme
 EN60950

Charging curve

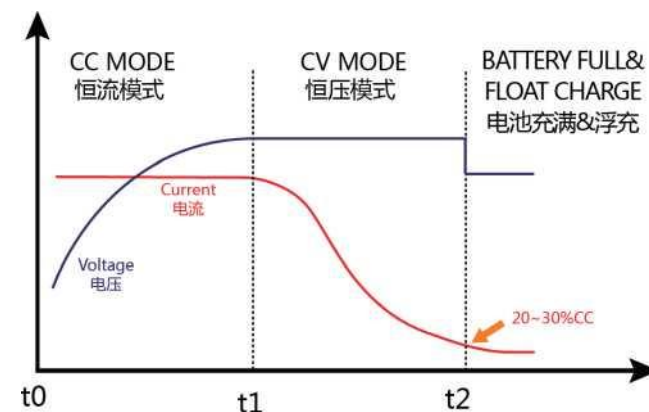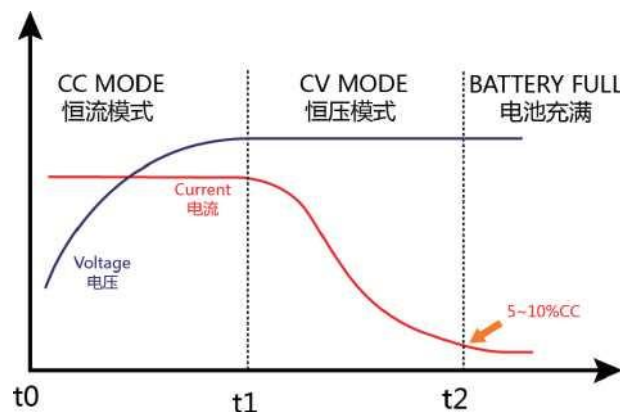

Electrical Specifications

		Output
Rated output	Refer to output reference	
Voltage setting accuracy	±1%	110/220Vac input
Total output voltage adjustment rate	1%	Power adjustment rate and load adjustment rate
Ripple	W output voltage 1 %	Main output (board edge) (Test with adding 0.1 uF ceramic capacitor and 10uF tantalum capacitor filter at the output and the bandwidth is 20MHz)
Short Circuit Protection (SCP)	Protect the power from damage	Relay off, no output
Output isolation		Safety standards
Output Over Current Protection (OCP)	Disconnected the output	The charger enter the standby protection state , when output current exceeds the max charging current.
Output Over Voltage Protection (OVP)	PWM off	The charger enter the standby protection state , when output current exceeds the max charging voltage .
Over-temperature protection	Automatic recovery	85°C (±5) Protect, 75°C (±5) Self-recovery
Reverse Polarity Protection	Automatic recovery	Relay off, no output

Output Reference

Model	Nominal Voltage	Constant Voltage	Constant Current	Switching Current		AC Input Plugs (optional)	DC Output Plugs (optional)	Adjustment Rate/Load Adjustment Rate
				Li (CC8%)	Lead-acid (CC25%)			
1	12 V	14.6 V	40 A	3200ma	10000ma	Refer to AC input plugs	Refer to DC output plugs	1%
2	24 V	29.4 V	25 A	2000ma	6250ma	Refer to AC input plugs	Refer to DC output plugs	1%
3	36 V	43.8 V	20 A	1600ma	5000ma	Refer to AC input plugs	Refer to DC output plugs	1%
4	48 V	58.8 V	15 A	1200ma	3750ma	Refer to AC input plugs	Refer to DC output plugs	1%
5	60 V	67.2 V	12 A	960ma	3000ma	Refer to AC input plugs	Refer to DC output plugs	1%
6	72 V	87.6 V	10 A	800ma	2500ma	Refer to AC input plugs	Refer to DC output plugs	1%
7	84 V	102.9 V	8 A	640ma	2000ma	Refer to AC input plugs	Refer to DC output plugs	1%