



优点及特征

工作电压平稳，在应用的寿命期内具有高而稳定的电压响应 低自放电率（在 +25°C 的条件下贮存，年自放电率低于 2%）
带过流保护、安全阀保护
卷绕式结构
已通过 UL、CE、SGS 认证
通过 ISO9001 质量管理体系认证

Key Characteristics

High and stable operating voltage
Low self-discharge rate (less than 2% after 1 year storage at +25°C)
Over-current protection and safety valve protection
Spiral type
UL, CE, SGS recognized
ISO9001 approved

性能数据


标称容量 1500mAh
额定电压 3.0V
最大连续工作电流 1500mA
最大脉冲电流 3000mA
电池重量 约 17g
电池最大外形尺寸 $\varnothing 17.0 \times 34.5\text{mm}$
工作温度 $-40^\circ\text{C} \sim +70^\circ\text{C}$

Electrical Characteristics

Nominal capacity 1500mAh
Nominal voltage 3.0V
Max. continuous current 1500mA
Max. pulse current capability 3000mA
Weight Approx. 17g
Dimension $\varnothing 17.0 \times 34.5\text{mm}$
Operating temperature range $-40^\circ\text{C} \sim +70^\circ\text{C}$


常温负载特性

Discharge Characteristics

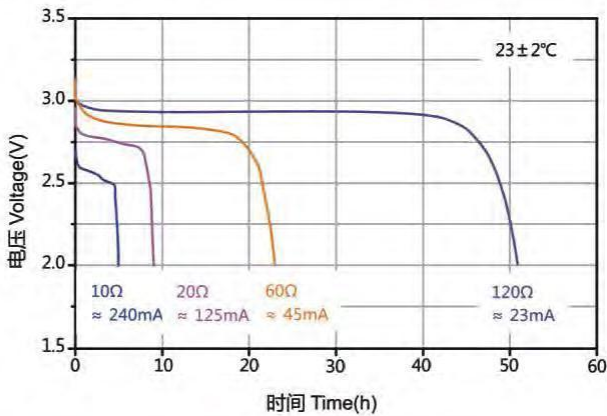


脉冲放电特性

Pulse Discharge Characteristics

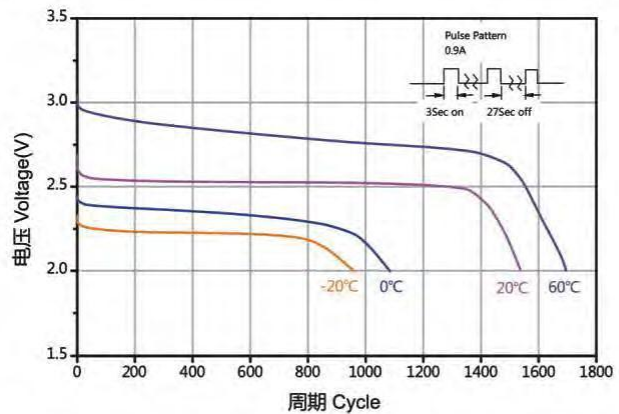


温度特性

Temperature Characteristics

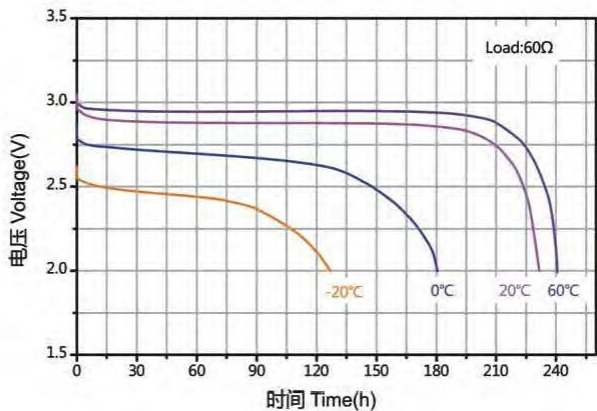

电池尺寸图

Battery Dimension



- + Available terminations:
- P axial pins
- 2PT/T radial pins
- 3PT/4PT polarized tabs

极端样式:

- P 轴向碰焊线
- 2PT/T 径向插件
- 3PT/4PT 多脚插件

- + Available terminations can be made as requested.
- 特殊极端样式可按客户要求订做