



LITHIUM BATTERY

CR18505



优点及特征

工作电压平稳，在应用的寿命期内具有高而稳定的电压响应 低自放电率（在 +25°C的条件下贮存，年自放电率低于 2%）
气密的玻璃封口金属外盖
卷绕式结构
已通过 CE、SGS 认证
通过 ISO9001 质量管理体系认证

Key Characteristics

High and stable operating voltage
Low self-discharge rate(less than 2% after 1 year storage at +25°C)
Hermetic glass-to-metal sealing
Spiral type
CE,SGS recognized
ISO9001 approved

性能数据


标称容量 2500mAh
额定电压 3.0V
最大连续工作电流 2000mA
最大脉冲电流 3000mA
电池重量 约35g
电池最大外形尺寸 Ø18.5*50.5mm
工作温度 -40°C ~ +85°C

Electrical Characteristics

Nominal capacity 2500mAh
Nominal voltage 3.0V
Max.continuous current 2000mA
Max.pulse current capability 3000mA
Weight Approx. 35g
Dimension Ø18.5*50.5mm
Operating temperature range -40°C ~ +85°C


常温负载特性

Discharge Characteristics

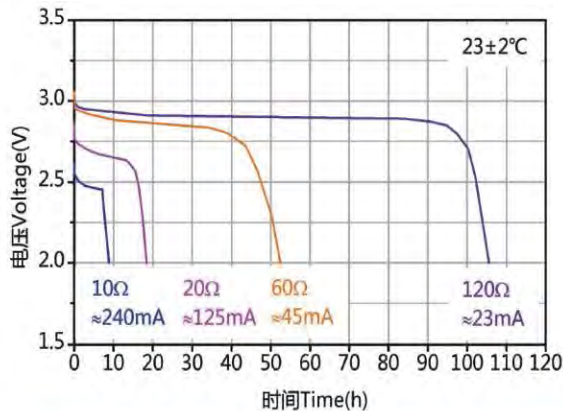


容量\电流\温度关系特性

Load-Capacity Characteristics

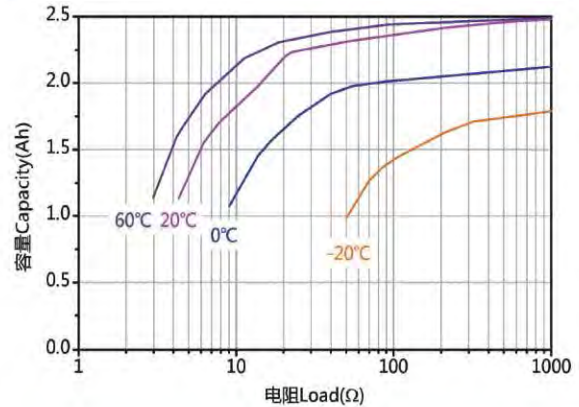


温度特性

Temperature Characteristics

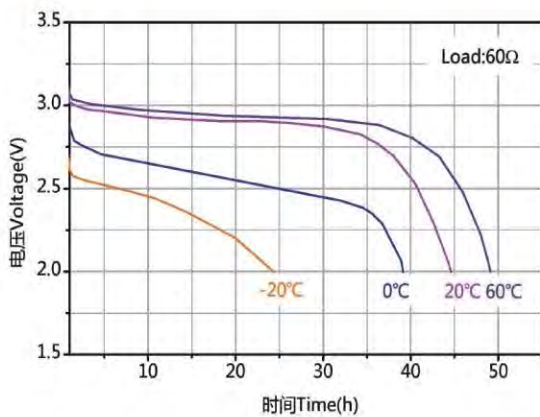

电池尺寸图

Battery Dimension

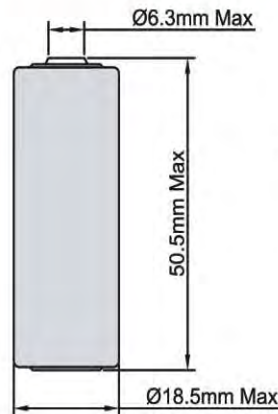

- + Available terminations:
- /P axial pins
- 2PT/T radial pins
- 3PT/4PT polarized tabs

极端样式：
-/P 轴向碰焊线
-2PT/T 径向插件
-3PT/4PT 多脚插件

+ Available terminations can be made as requested.
特殊极端样式可按客户要求订做