



**优点及特征**

工作电压平稳，在应用的寿命期内具有高而稳定的电压响应 低自放电率（在 +25°C 的条件下贮存，年自放电率低于 2%）  
 带过流保护、安全阀保护  
 卷绕式结构  
 已通过 CE、SGS 认证  
 通过 ISO9001 质量管理体系认证

**Key Characteristics**

High and stable operating voltage  
 Low self-discharge rate (less than 2% after 1 year storage at +25°C)  
 Over-current protection and safety valve protection  
 Spiral type  
 CE, SGS recognized  
 ISO9001 approved

**性能数据**


标称容量	2100mAh
额定电压	3.0V
最大连续工作电流	1500mA
最大脉冲电流	3000mA
电池重量	约23g
电池最大外形尺寸	Ø17.0*45.5mm
工作温度	-40°C ~ +70°C

**Electrical Characteristics**

Nominal capacity	2100mAh
Nominal voltage	3.0V
Max. continuous current	1500mA
Max. pulse current capability	3000mA
Weight	Approx. 23g
Dimension	Ø17.0*45.5mm
Operating temperature range	-40°C ~ +70°C


**常温负载特性**

**Discharge Characteristics**

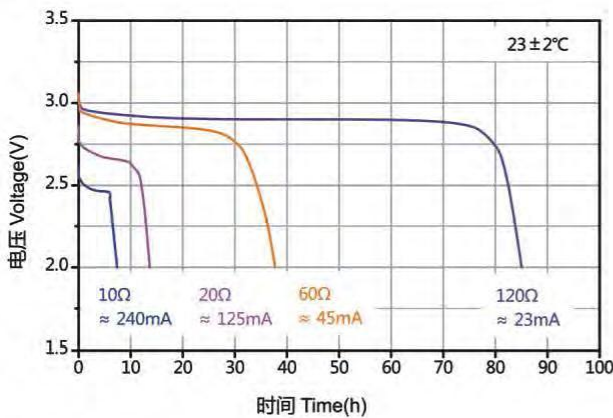


**容量、电流、温度关系特性**

**Load-Capacity Characteristics**

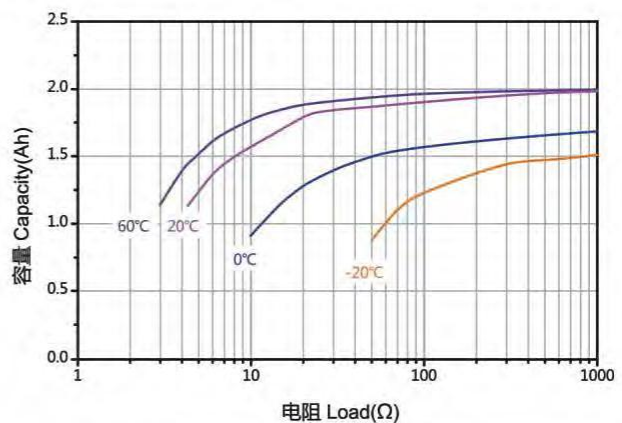


**温度特性**

**Temperature Characteristics**

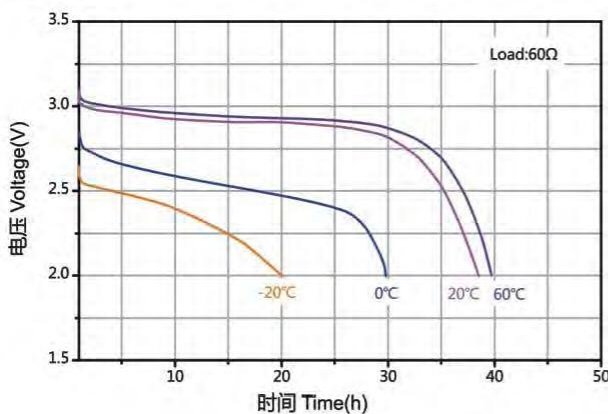

**电池尺寸图**

**Battery Dimension**

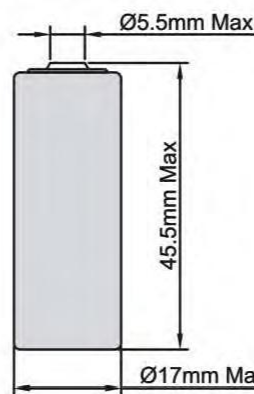

- + Available terminations:  
 -/P axial pins  
 -2PT/T radial pins  
 -3PT/4PT polarized tabs

极端样式：  
 -/P 轴向碰焊线  
 -2PT/T 径向插件  
 -3PT/4PT 多脚插件

- + Available terminations can be made as requested.  
 特殊极端样式可按客户要求订做