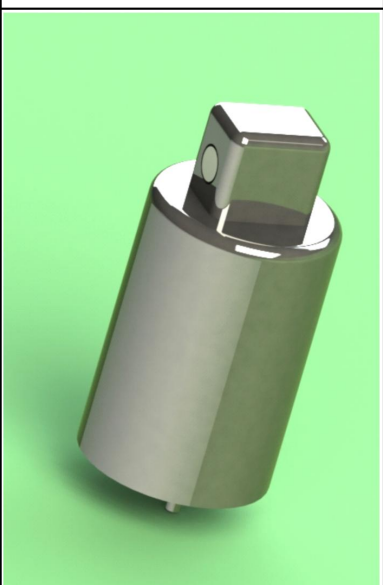
	产品型号/Model: <b>TB-123</b>	工作电压 Operating Voltage	A:24V~32V B:24V~32V
	工作电流 Operating Current	0~10s(0.15A), 10~30s(4A), 30~50s(9A)	
	工作时间 Operating Time	≥50s	
	激活时间 Activation Time	≤1s	
	噪音电压 Noise Voltage	—	
	表面温度 Surface Temperature	—	
	工作温度 Operating temperature	-40℃~+50℃	
	激活方式 Activation Mechanism	过载激活: 3000g Overload: 3000g	
	外形尺寸 Envelope Dimension	Φ92mm×45mm	
	重量 Weight	≤700g	
	其他要求 Additional requirements	过载/Overload Resisitance: — 旋转/Rotation: —	

	产品型号/Model: <b>TB-124</b>	工作电压 Operating Voltage	>15V
	工作电流 Operating Current	≥18A	
	工作时间 Operating Time	≥10s	
	激活时间 Activation Time	≤0.5s	
	噪音电压 Noise Voltage	—	
	表面温度 Surface Temperature	—	
	工作温度 Operating temperature	-40℃~+50℃	
	激活方式 Activation Mechanism	机械激活,激活能量: 80g·cm Activation energy: 80g·cm	
	外形尺寸 Envelope Dimension	Φ15mm×22mm	
	重量 Weight	≤100g	
	其他要求 Additional requirements	过载/Overload Resisitance: — 旋转/Rotation: —	