



LITHIUM BATTERY  
**ER26500HC**

优点及特征

工作电压平稳，在应用的寿命期内具有高而稳定的电压响应 低自放电率（在 +25°C 的条件下贮存，年自放电率低于 1%）  
气密的玻璃封口金属外盖  
非可燃性电解液  
碳包式结构  
已通过 UL、CE、SGS 认证  
通过 ISO9001 质量管理体系认证

Key Characteristics

High and stable operating voltage  
Low self-discharge rate(less than 1% after 1 year storage at +25°C)  
Hermetic glass-to-metal sealing  
Non-flammable electrolyte  
Bobbin type  
UL,CE,SGS recognized  
ISO9001 approved


性能数据

标称容量	9000mAh
额定电压	3.6V
最大连续工作电流	300mA
最大脉冲电流	600mA
电池重量	约55g
电池最大外形尺寸	Ø26.2*50.0mm
工作温度	-60°C ~ +85°C


Electrical Characteristics

Nominal capacity	9000mAh
Nominal voltage	3.6V
Max.continuous current	300mA
Max.pulse current capability	600mA
Weight	Approx. 55g
Dimension	Ø26.2*50.0mm
Operating temperature range	-60°C ~ +85°C


25°C放电特性 Discharge Characteristics(25°C)

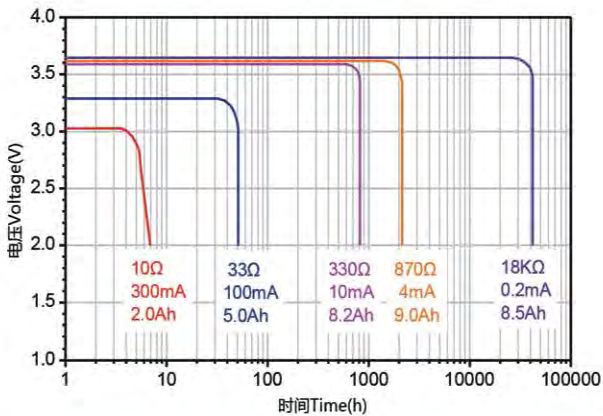


电压与温度关系 Voltage vs. Temperature

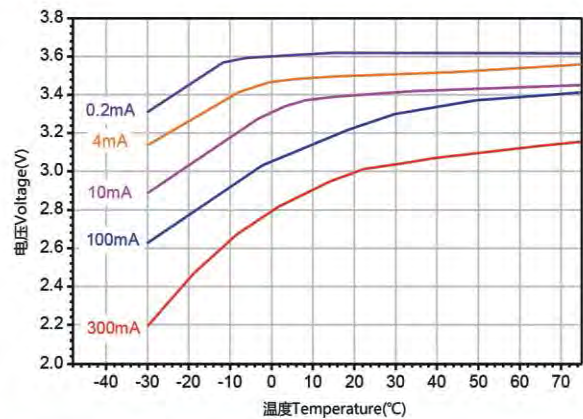

容量与电流关系 Capacity vs. Current

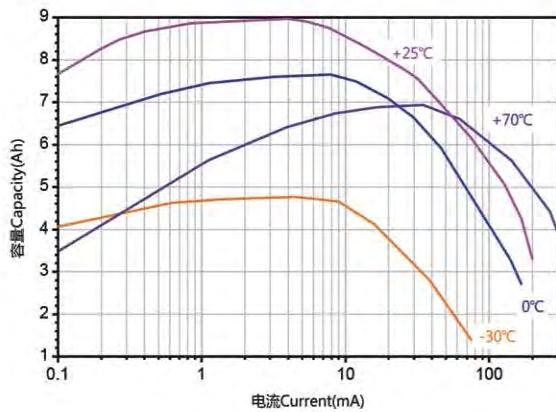

电池尺寸图 Battery Dimension

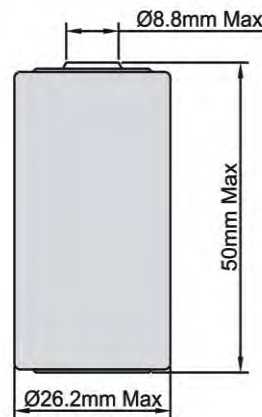

- + Available terminations:  
-P axial pins  
-2PT/T radial pins  
-3PT/4PT polarized tabs

极端样式：  
-P 轴向碰焊线  
-2PT/T 径向插件  
-3PT/4PT 多脚插件

- + Available terminations can be made as requested.  
特殊极端样式可按客户要求订做