



优点及特征

工作电压平稳，在应用的寿命期内具有高而稳定的电压响应，低自放电率（在+25°C的条件下贮存，年自放电率低于1%）  
 气密的玻璃封口金属外盖  
 非可燃性电解液  
 碳包式结构  
 已通过CE、SGS认证  
 通过ISO9001 质量管理体系认证

Key Characteristics

High and stable operating voltage  
 Low self-discharge rate (less than 1% after 1 year storage at +25°C)  
 Hermetic glass-to-metal sealing  
 Non-flammable electrolyte  
 Bobbin type  
 CE, SGS recognized  
 ISO9001 approved


性能数据

标称容量	2400mAh
额定电压	3.9V
最大连续工作电流	100mA
最大脉冲电流	200mA
电池重量	约19g
电池最大外形尺寸	Ø14.5*50.5mm
工作温度	-60°C ~ +85°C


Electrical Characteristics

Nominal capacity	2400mAh
Nominal voltage	3.9V
Max. continuous current	100mA
Max. pulse current capability	200mA
Weight	Approx. 19g
Dimension	Ø14.5*50.5mm
Operating temperature range	-60°C ~ +85°C


25°C放电特性 Discharge Characteristics(25°C)

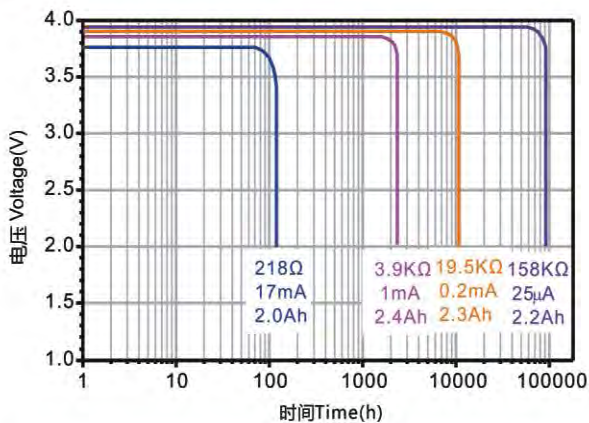


电压与温度关系 Voltage vs. Temperature

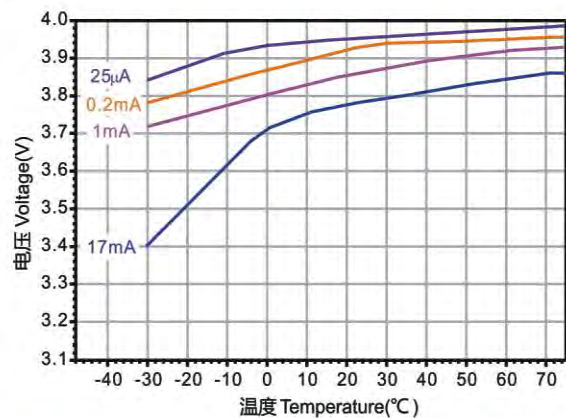

容量与电流关系 Capacity vs. Current

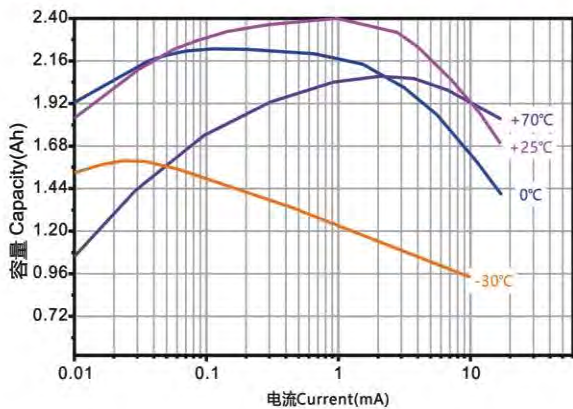

电池尺寸图 Battery Dimension

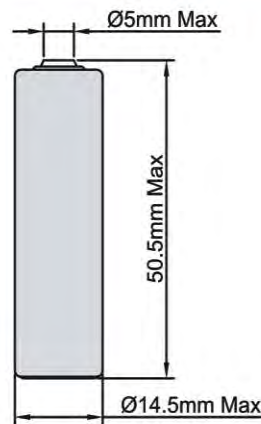

- + Available terminations:  
 -/P axial pins  
 -2PT/T radial pins  
 -3PT/4PT polarized tabs

极端样式：  
 -/P 轴向碰焊线  
 -2PT/T 径向插件  
 -3PT/4PT 多脚插件

- + Available terminations can be made as requested.  
 特殊极端样式可按客户要求订做